



Scan for full manual

KT-1010 / KT-1010RB Quick Start Guide

This guide helps you install and use your KT-1010 / KT-1010RB for the first time.

Go to www.kramerav.com/downloads/KT-1010 or www.kramerav.com/downloads/KT-1010RB to download the latest user manual and check if firmware upgrades are available.

Step 1: Check what's in the box

- ✓ KT-1010 Touch Panel or KT-1010RB Touch Panel (Reduced Bandwidth)
- ✓ 12V AC/DC power adapter
- ✓ Panel mount bracket
- ✓ 1 Quick start guide
- ✓ Tabletop mount
- ✓ On-wall mount bracket
- ✓ Installation screws
- ✓ 1 Allen key

Step 2: Get to know your KT-1010 / KT-1010RB




#	Feature	Function
1	Volume setup button (+/-)	Press to increase/decrease KT-1010/KT-1010RB speaker volume.
2	Up/Down (Δ/∇) Keys	Press to scroll through the menu options.
3	Exit Button	Press to exit the menu.
4	SD Card Slot and Cover	Add an external memory.
5	Power LED	Power on indication. Orange when loading, then turns green.
6	3 Add-on USB Module Slots	For future use.
7	2 Speakers	To output the sound.
8	4 VESA Mounting Screw Holes (75x75mm)	Connect to a VESA kit to mount on the wall.
9	12V DC Input with Cable Security Lock	Connect to the AC/DC adapter and to the mains.
10	Ethernet PoE RJ-45 Connector	Connect to a PC via a LAN.
11	USB Type A Port	Connect to USB peripherals (such as a keyboard, printer, etc.).
12	Micro USB Port	Connect to USB peripherals (such as a keyboard, printer, etc.).
13	2 Control I/O Ports	For future use.
14	Power ON/OFF Switch	Press to turn power on or off.
15	Headphone 3.5mm Mini Jack	Connect to a headphone.
16	Camera	For video conferencing.
17	Microphone	For video conferencing or audio recording.

Step 3: Mount KT-1010 / KT-1010RB

This section describes **KT-1010** but applies also to **KT-1010RB**.

To mount **KT-1010** on a wall using the VESA kit:

1. Secure the on-wall mount to the wall using the installation screws.
2. Attach the panel mount bracket to the VESA mounting holes on the rear side of the **KT-1010**.
3. Slide the panel mount bracket to the on-wall bracket already mounted on the wall.

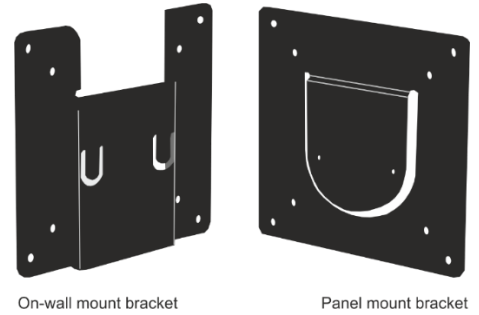

To mount **KT-1010** on a table:

1. Remove the two panel screws on the rear lower-side panel of the tabletop mount.
2. Pass the cables through the opening on the rear side.
3. Connect the cables to **KT-1010**.
4. Turn the power switch on the rear of the touch panel (14) to ON.
5. Place **KT-1010** into the tabletop mount.
6. Reconnect the lower-side panel using the two panel screws.
7. Secure **KT-1010** from the rear side, via the Tabletop Mount holes, to the VESA mounting holes on the rear side of the **KT-1010**.
If required, lock the device using the Kensington lock slot on the right lower side of the table-mount top.



- Ensure that the environment (e.g., maximum ambient temperature & air flow) is compatible for the device.
- Avoid uneven mechanical loading.
- Appropriate consideration of equipment nameplate ratings should be used for avoiding overloading of the circuits.
- Reliable earthing of rack-mounted equipment should be maintained.

Step 4: Connect power

Connect the Ethernet port to a PoE Ethernet port, using a PoE-compliant Ethernet cable.

Alternatively, or in addition to PoE powering, connect the power adapter to the 12V AC/DC power socket and to the mains electricity.



Safety Instructions (See www.kramerav.com for updated safety information).

Caution:



- There are no operator serviceable parts inside the unit.

Warning:

- Use only the power cord that is supplied with the unit.
- Disconnect the power and unplug the unit from the wall before installing.

Step 5: Operate KT-1010 / KT-1010RB

1. Turn the power switch on the rear of the touch panel to ON.
Wait for Kramer Control log-in page to load.
2. Sign in as follows:
 - If the device is connected to the Internet via cable, click **SIGN IN** on the panel.
 - If the device is connected to the Internet via Wi-Fi:
 - Press the Exit button (on the **KT-1010/KT-1010RB** top side) and then type the password (default: Kramer).
 - Click **Home Page>Settings>Wi-Fi** and choose your SSID Network.
 - Reboot your device.

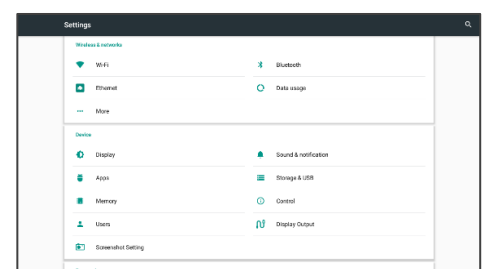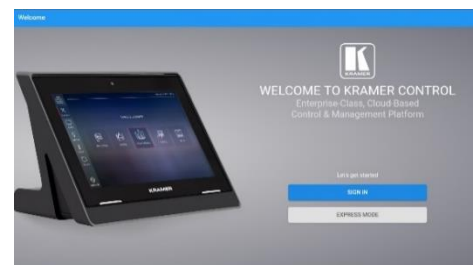

KramerAppUpdate automatically updates Kramer apps.

Tap **Home-Page>App Icon>KramerAppUpdate** to view installed and available app versions and to change the Server Check Interval.

3. Operate the Kramer Control App.