



Scan for full manual

## VM-2DH Quick Start Guide


This guide helps you install and use your VM-2DH for the first time.

Go to [www.kramerav.com/downloads/VM-2DH](http://www.kramerav.com/downloads/VM-2DH) to download the latest user manual and check if firmware upgrades are available.

### Step 1: Check what's in the box

- ✓ VM-2DH DisplayPort to DVI/HDMI Converter
- ✓ 4 Rubber feet
- ✓ 1 Bracket set
- ✓ 1 Power supply (5V DC)
- ✓ 1 Quick start guide

### Step 2: Get to know your VM-2DH

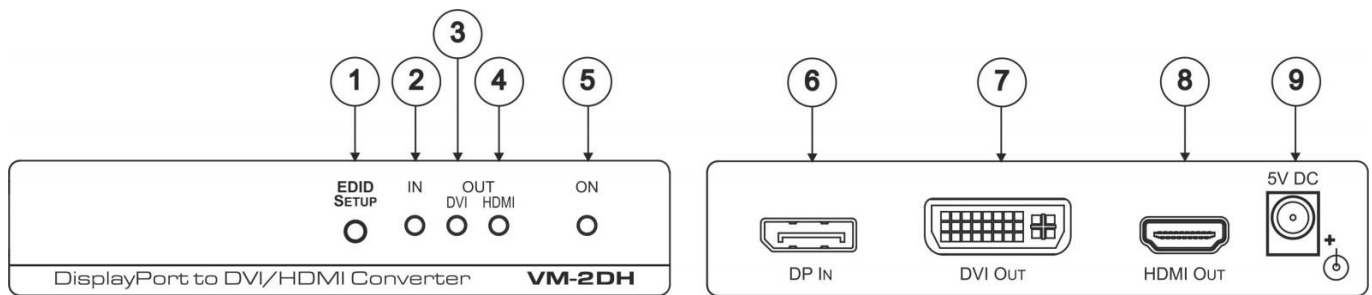


#	Feature	Function
1	EDID SETUP Button	Press to cycle through the EDID sources and to read the EDID (see Step 6)
2	IN LED	Lights green when the input is active; flashes when the input is not valid
3	OUT DVI LED	Lights green when a DVI acceptor output is connected
4	OUT HDMI™ LED	Lights green when an HDMI acceptor is connected
5	ON LED	Lights green when the unit is powered on
6	DP IN DisplayPort Connector	Connect to the DisplayPort digital source
7	DVI OUT Connector	Connect to the DVI acceptor
8	HDMI OUT Connector	Connect to the HDMI acceptor
9	5V DC	Connect to the 5V DC power adapter, center pin positive

The terms HDMI, HDMI High-Definition Multimedia Interface, and the HDMI Logo are trademarks or registered trademarks of HDMI Licensing Administrator, Inc.

### Step 3: Mount VM-2DH

Install VM-2DH using one of the following methods:

- Attach the rubber feet and place the unit on a flat surface.
- Fasten a bracket (included) on each side of the unit and attach it to a flat surface (see [www.kramerav.com/downloads/VM-2DH](http://www.kramerav.com/downloads/VM-2DH)).
- Mount the unit in a rack using the recommended rack adapter (see [www.kramerav.com/product/VM-2DH](http://www.kramerav.com/product/VM-2DH)).




- Ensure that the environment (e.g., maximum ambient temperature & air flow) is compatible for the device.
- Avoid uneven mechanical loading.
- Appropriate consideration of equipment nameplate ratings should be used for avoiding overloading of the circuits.
- Reliable earthing of rack-mounted equipment should be maintained.

---

## Step 4: Connect inputs and outputs

Always switch OFF the power on each device before connecting it to your VM-2DH.

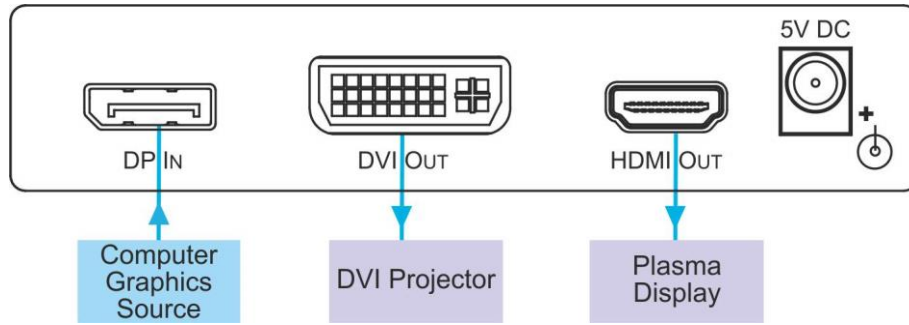

To achieve specified extension distances, use the recommended Kramer cables available at [www.kramerav.com/product/VM-2DH](http://www.kramerav.com/product/VM-2DH). Using third-party cables may cause damage!

---

## Step 5: Connect power

Connect the power cord to VM-2DH and plug it into the mains electricity.

Safety Instructions (See [www.kramerav.com](http://www.kramerav.com) for updated safety information)

**Caution:**

- For products with relay terminals and GPIO ports, please refer to the permitted rating for an external connection, located next to the terminal or in the User Manual.
- There are no operator serviceable parts inside the unit.

**Warning:**

- Use only the power cord that is supplied with the unit.
- Disconnect the power and unplug the unit from the wall before installing.

---

## Step 6: Operate VM-2DH

Initially the VM-2DH operates with the factory default EDID stored in the non-volatile memory. The source reads the EDID from the device when the device is plugged in or powered on.

If required, acquire the EDID:

- Connect the output(s) from which you want to acquire the EDID.
- Select the required EDID by pressing and holding the EDID SETUP button to cycle through the options; HDMI OUT, DVI OUT, Auto-Mix, and default.
- When you reach the desired setup, release the EDID SETUP button to acquire the EDID.