



Scan for full manual

VM-22H Quick Start Guide

This guide helps you install and use your VM-22H for the first time.

Go to www.kramerav.com/downloads/VM-22H to download the latest user manual and check if firmware upgrades are available.


Step 1: Check what's in the box

- ✓ VM-22H 2x1:2 HDMI Switcher/DA
- ✓ 1 Power supply (5V DC)
- ✓ 4 Rubber feet
- ✓ Kramer **RC-IR3** Infrared Remote Control Transmitter with batteries and user manual
- ✓ 1 Quick start guide

Step 2: Mount VM-22H

Install **VM-22H** using one of the following methods:


- Attach the rubber feet and place the unit on a flat surface.
- Fasten a bracket on each side of the unit and attach it to a flat surface (see www.kramerav.com/downloads/VM-22H).
- Mount the unit in a rack using the recommended rack adapter (see www.kramerav.com/product/VM-22H).



- Ensure that the environment (e.g., maximum ambient temperature & air flow) is compatible for the device.
- Avoid uneven mechanical loading.
- Appropriate consideration of equipment nameplate ratings should be used for avoiding overloading of the circuits.
- Reliable earthing of rack-mounted equipment should be maintained.
- Maximum mounting height for the device is 2 meters.

Step 3: Connect inputs and outputs

Always switch OFF the power on each device before connecting it to your VM-22H.

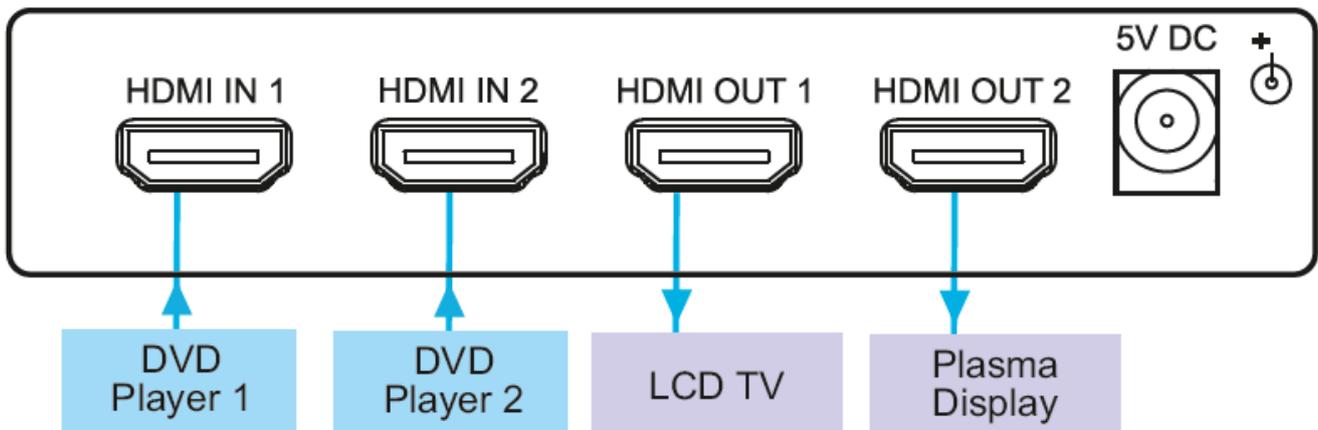

To achieve specified extension distances, use the recommended Kramer cables available at www.kramerav.com/product/VM-22H. Using third-party cables may cause damage!

The terms HDMI, HDMI High-Definition Multimedia Interface, and the HDMI Logo are trademarks or registered trademarks of HDMI Licensing Administrator, Inc.

Step 4: Connect power

Connect the power cord to **VM-22H** and plug it into the mains electricity.

Safety Instructions (See www.kramerav.com for updated safety information)



Caution:

- For products with relay terminals and GPIO ports, please refer to the permitted rating for an external connection, located next to the terminal or in the User Manual.
- There are no operator serviceable parts inside the unit.

Warning:

- Use only the power cord that is supplied with the unit.
- Disconnect the power and unplug the unit from the wall before installing.

Step 5: Operate the VM-22H



1. Press the EDID SETUP button to cycle through the EDID sources in the following order:
 - a. Output 1 (Out 1 LED lights)
 - b. Output 2 (Out 2 LED lights)
 - c. Default EDID (Out 1 and 2 LEDs flash)
 - d. Auto-Mix EDID (Out 1 and 2 LEDs light)
2. To store the EDID, release the button and the EDID is acquired.