

1 The Kramer Mud Ring

The supplied Kramer **Mud Ring** is used for mounting 3-gang wall plates on plaster board or wooden hollow walls. The **Mud Ring** does not need to be fastened to wall studs. [Figure 1](#) defines the **Mud Ring**.

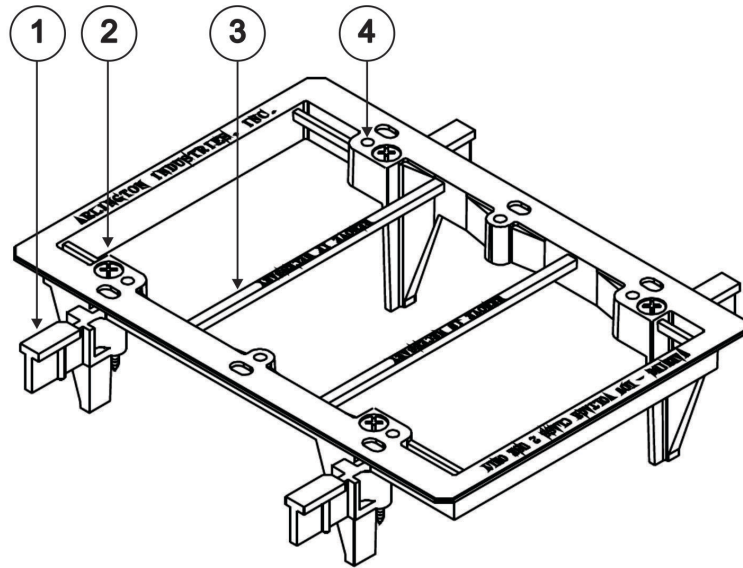


Figure 1: Mud Ring

#	Feature	Function
1	Mounting Brackets	4 swivel brackets that secure the mud ring to the wall
2	Mounting Screws	4 screws that tighten the mounting brackets against the wall
3	Separator Bars	2 plastic bars that are removed before installation
4	Screw Holes	6 screw holes for attaching the insert/wall plate (6 3.5x10 self tapping screws are included with the unit)

2 Installing the Mud Ring:

1. Cut a square opening in the wall 145mm (5.7") wide by 95mm (3.7") high (see [Figure 2](#)).
2. Turn the four mounting brackets toward the inside of the mud ring. Do not remove them.
3. Insert the mud ring into the opening in the wall.
4. Tighten the four mounting screws to pull the brackets snugly against the inside of the wall. The brackets swivel into position when turned. Do not over-tighten.
5. As needed, cut or break off and remove the two plastic separator bars that cross the middle of the unit (when installing a 3-gang wall plate).
6. Mount the 3-gang wall plate using the included 6 self tapping screws (not shown).

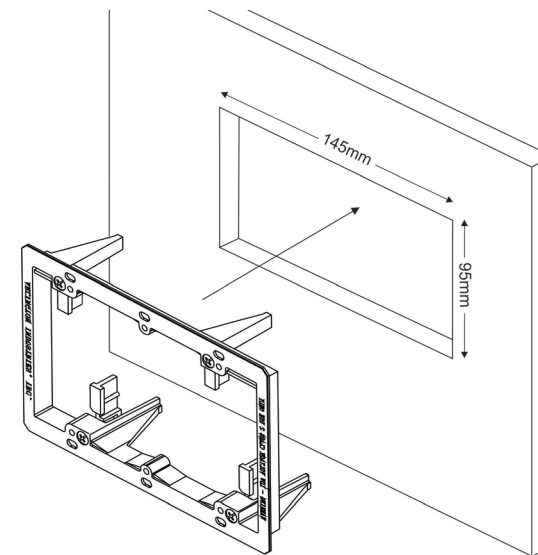


Figure 2: Mounting the Mud Ring



KRAMER ELECTRONICS LTD.

INSTALLATION INSTRUCTIONS

MODEL:

Mud Ring



For the latest information on our products and a list of Kramer distributors,
visit our Web site at www.kramerelectronics.com

E-mail: info@kramerel.com

P/N: 2900-300050 Rev 1



PN: 2900-300050



Rev: 1